



Dispenser Technology – Wayne Helix 6000-II

Model Overview

Apr-2022

DFS *Worldwide* Brands

Wayne FUELING SYSTEMS OPW FUEL MANAGEMENT SYSTEMS ClearView

TOKHEIM ProGauge fairbanks

WE
ARE

OUR VALUES

A Collaborative
Entrepreneurial Spirit

Winning
Through Customers

Engaging
in High Ethical
Standards, Openness
and Trust

Fostering
Expectations for
Results

Respecting
and Valuing People



WE
ARE

OUR VISION

Enabling the
evolution of
consumer
experience in
fueling and
convenience retail.



WE
ARE

OUR MISSION

A leading global
provider of
advanced
customer-
focused
technologies,
services and
solutions in the fuel
and convenience
retail industries.



WE
ARE

OUR CULTURE

A team committed to
doing great things,
collaborating to
deliver exceptional
business results for
our customers. We
are accountable,
results driven and
create value, through
innovation,
continuous
improvement and
execution excellence.



WE
ARE

**CULTIVATING
EXCELLENCE**

Aligned

Accountable

Engaged

Problem Solvers

**Customer-
Centric**

**Celebratory in
Success**

**Execution
Champions**





Wayne Dispenser Technology




Designed with field-proven global components and corrosion resistant materials, Wayne fuel dispensers offer exceptional reliability

- Strong corrosion protection from high quality materials & design without welded corners
- Assembled to the highest standard with rigorous testing & quality control
- Designed with leading pumping technology using gear pump for reliable longevity
- Superior uptime in field, with reliable operation from long-lasting components
- Better total cost of ownership from less service required during lifetime

Designed for superior stability and accuracy over the lifetime of the dispenser, our fuel meter ensures accurate metering in all conditions

- Robust meter for optimal performance in all conditions
- Technology leadership with exceptional stability with minimal drift of 0.04% over 8 million liters
- Certified accuracy with meter performance verified by independent test lab
- Electronic calibration and industry-best resolution of 400 pulses per liter for accuracy across all flow rates
- Better total cost of ownership from minimal drift, reliable performance and minimal recalibration requirement

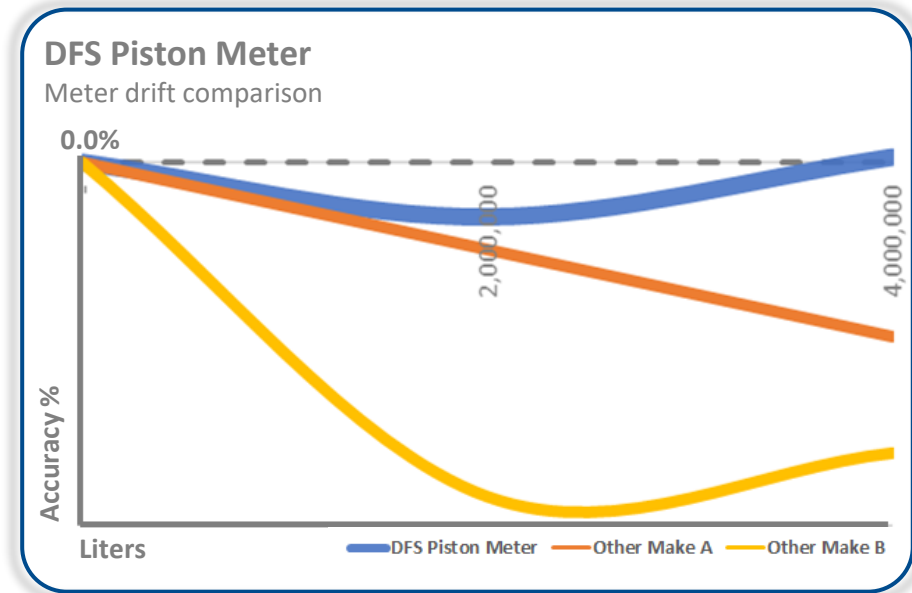




Designed with safety in mind, from assembly to installation and daily operation, Wayne fuel dispensers come with intelligent safety features as standard

- Safety-focused design that avoids working at height for expected service interventions like hose replacements due to natural wear
- Patented double-bump pipe couplings minimize faulty assembly for secured seal
- Ergonomically optimized positioning of nozzles to ensure DDA compliance
- Better total cost of ownership from less service with improved protection against leaks over lifetime

Modern intelligent design that provides accurate metering and a long lifetime with less service interventions for low total cost of ownership. Technology leadership to the Core!

- Built to last with durable design using field-proven components that require less service
- Strong corrosion protection to ensure a long lifetime
- Robust design with single bottom-frame & strong chassis for improved structural framework
- Reliable operation from accurate metering and stable field-proven electronics
- Better total cost of ownership from intelligent design with fewer parts wearing over lifetime

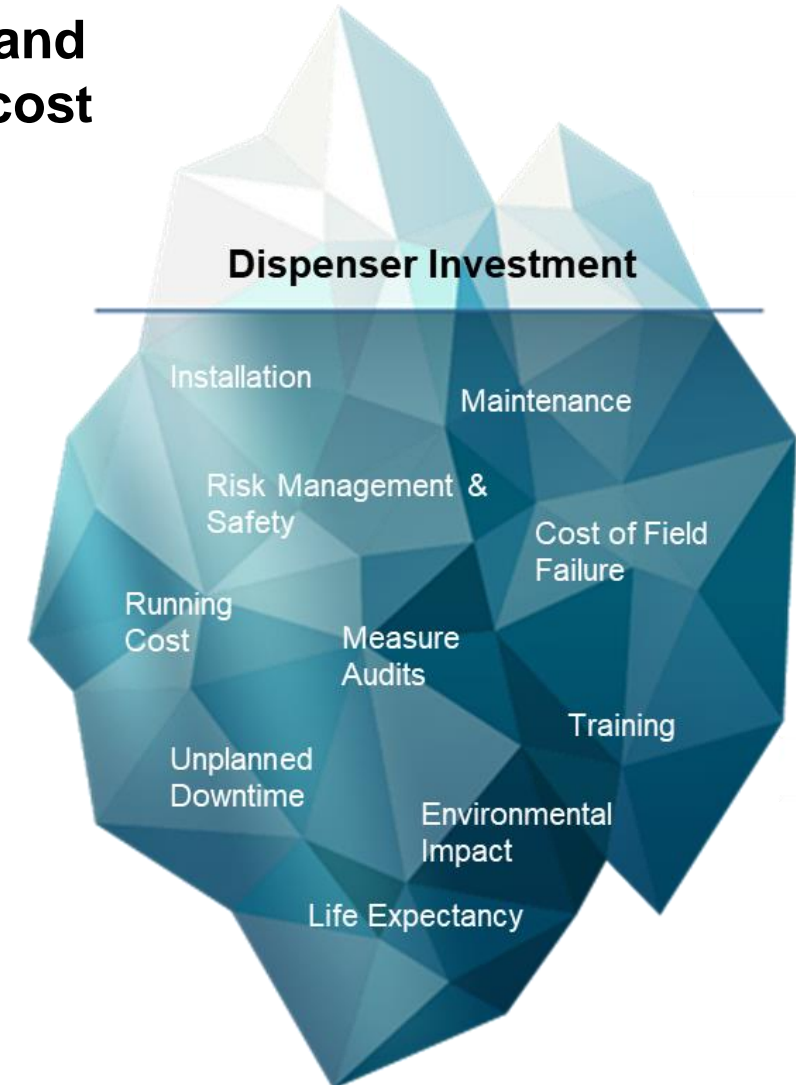

Wayne Helix 6000-II

Dispenser Technology

Reliability through Technology Leadership

Wayne fuel dispensers are known for its leading technology in all core components

Superior Meter Stability

Designed for reliable performance with all fuel types over the lifetime of the dispenser, our fuel meter maintains exceptional stability with minimal drift

Reliable Performance

Continuously raising the bar with innovation and intelligent design, our field-proven core components are recognized for its superior technology delivering reliable performance

Total Cost of Ownership

Innovative design offering reliable performance, exceptional meter stability and a long life with less service interventions for low total cost of ownership.



Based on our global technology platform, Wayne fuel dispensers are recognized for innovation, reliability and great versatility, offering almost endless configuration possibilities

Conventional Fuel



Century 3



H4000 II



H5000 II



H6000 II



H6000 II Additive

AdBlue



Century 3 AdB



H6000 II AdB



H6000 II B2B AdB

LPG



Century 3 LPG



H6000 II LPG



H6000 II B2B LPG

CNG



H6000 II CNG



H6000 II B2B CNG

Wayne Helix 6000-II

Nomenclature

Wayne Helix 6000-II

Nomenclature

New Naming Convention

Name	Model Nomenclature					
H6000-II	X	-	X	-	X	xyz
	Number of grades available		Total number of nozzles		Number of hose column positions	Denomination of type (other than standard)

- High Speed (HS) 70 LPM is available as option (not special model config)
- High Speed 40-70 LPM switching is available as option (not special model config)



Helix 6000-II 3-6-3

Wayne Helix 6000-II

Conventional Fuels – Model Details

Wayne technology with true modularity for up to five grades in shared hose cabinet and choice of hose retraction



Available also as back-to-back for alternative fuels

Helix 6000-II

Orientation: Lane (Dual-sided or Single-sided)

Hydraulic System: Suction or Remote Pressure

Grades available: 1 to 5

Nozzles available: 1 to 10

Flow Rates^a available: 40, 40-70, 70, or 120 LPM

Hose Reach: 4.0m with FHR, 3.5m with LHR

Electronics: iGEM pump computer

Metering: P-Meter (Piston) or Xflo. Optional ATC

Vapour Recovery: EVR or SC-EVR options

Options: Extensive range of optional extras available

Pump Media: 12" Digital screen for T-Media available

Payment: Integrated payment options available

a) Flow rates are indicative as actual flow rates depends on the underground fuel installation. Actual flow rates can vary +/- 10% from nominal flow rates.

	Length	Width	Height
H6000-II 1-X-1	920	600	2050
H6000-II 2-X-2	1060	600	2050
H6000-II 3-X-3	1440	600	2050
H6000-II 4-X-4	1820	600	2050
H6000-II 5-X-5	2200	600	2050

Model Configurations (Standard Flow)

Helix 6000-II	Nomenclature	Model Characteristics	H6000
1-1-1	1 Grade Out, 1 Nozzle, 1 Hose column	Lane orientation, single-sided. Single delivery 40. 1 SAT A/B (70LPM). 1 Inlet, 1 Hydraulic position	11-11 (SS)
1-2-1	1 Grade Out, 2 Nozzle, 1 Hose column	Lane orientation, dual-sided. Dual delivery 40+40. 2 SAT A+B (70LPM). 1 Inlet, 1 Hydraulic position	11-11 (DS)
2-2-2	2 Grades Out, 2 Nozzles, 2 Hose columns	Lane orientation, single-sided. Single delivery 40/40. 2 Inlets, 2 Hydraulic positions	22-22 (SS)
2-4-2	2 Grades Out, 4 Nozzles, 2 Hose columns	Lane orientation, dual-sided. Dual delivery 40/40+40/40. 2 Inlets, 2 Hydraulic positions	22-22 (DS)
3-3-3	3 Grades Out, 3 Nozzles, 3 Hose columns	Lane orientation, single-sided. Single delivery 40/40/40. 3 Inlets, 3 Hydraulic positions	33-33 (SS)
3-6-3	3 Grades Out, 6 Nozzles, 3 Hose columns	Lane orientation, dual-sided. Dual delivery 40/40/40+40/40/40. 3 Inlets, 3 Hydraulic positions	33-33 (DS)
4-4-4	4 Grades Out, 4 Nozzles, 4 Hose columns	Lane orientation, single-sided. Single delivery 40/40/40/40. 4 Inlets, 4 Hydraulic positions	44-44 (SS)
4-8-4	4 Grades Out, 8 Nozzles, 4 Hose columns	Lane orientation, dual-sided. Dual delivery 40/40/40/40+40/40/40/40. 4 Inlets, 4 Hydraulic positions	44-44 (DS)
5-5-5	5 Grades Out, 5 Nozzles, 5 Hose columns	Lane orientation, single-sided. Single delivery 40/40/40/40/40. 5 Inlets, Hydraulic positions	55-55 (SS)
5-10-5	5 Grades Out, 10 Nozzles, 5 Hose columns	Lane orientation, dual-sided. Dual delivery 40/40/40/40+40/40/40/40/40. 5 Inlets, 5 Hydraulic positions	55-55 (DS)

Retail Speed suction use retail capacity (RC) pumping unit

- High Speed (HS) 70 LPM is available as option
- High Speed 40-70 LPM switching is available as option

Model Configurations (Very High Speed Flow)

Helix 6000-II	Nomenclature	Model Characteristics	H6000
1-1-1 1VHS-S	1 Grade Out, 1 Nozzle, 1 Hose column	Lane orientation, single-sided. Single delivery 120. 1 SAT A/B. 2 Inlets, 2 Hydraulic positions	?
1-2-1 1VHS-nS	1 Grade Out, 2 Nozzles, 1 Hose column	Lane orientation, dual-sided. Dual delivery 120*+120*. 2 SAT A+B. 2 Inlets, 2 Hydraulic positions	?
1-2-1 1VHS-S	1 Grade Out, 2 Nozzles, 1 Hose column	Lane orientation, dual-sided. Dual delivery 120+120. 2 SAT A+B. 2 Inlets, 2 Hydraulic positions	?
1-2-2 1VHS-S	1 Grade Out (1 shared), 2 Nozzles, 2 Hose columns	Lane orientation, single-sided. Single delivery 120/40. 2 Inlets, 2 Hydraulic positions	?
1-4-2 1VHS-nS	1 Grade Out (1 shared), 4 Nozzles, 2 Hose columns	Lane orientation, dual-sided. Dual delivery 120*/40+120*/40. 2 SAT A+B. 2 Inlets, 2 Hydraulic positions	?
1-4-2 1VHS-S	1 Grade Out (1 shared), 4 Nozzles, 2 Hose columns	Lane orientation, dual-sided. Dual delivery 120/40+120/40. 2 SAT A+B. 2 Inlets, 2 Hydraulic positions	?

Very High Speed applications will use combination of RC & HC pumping units

- 1VHS-S will deliver 120 LPM also when both sides are in use simultaneously
- 1VHS-nS will deliver 90 LPM when both sides are in use simultaneously, but 120 LPM when used singularly. 120* = non-simultaneously

Model Configurations (Very High Speed Flow)

Helix 6000-II	Nomenclature	Model Characteristics	H6000
2-2-2 1VHS-S	2 Grades Out, 2 Nozzles, 2 Hose columns	Lane orientation, single-sided. Single delivery 120/40. 1 SAT A/B. 3 Inlets, 3 Hydraulic positions	?
2-4-2 2VHS-S	2 Grades Out, 4 Nozzles, 2 Hose columns	Lane orientation, dual-sided. Dual delivery 120/120+120/120. 2 SAT A+B. 4 Inlets, 4 Hydraulic positions	?
2-4-2 1VHS-nS	2 Grades Out, 4 Nozzles, 2 Hose columns	Lane orientation, dual-sided. Dual delivery 120*/40+120*/40. 2 SAT A+B. 3 Inlets, 3 Hydraulic positions	?
2-4-2 1VHS-S	2 Grades Out, 4 Nozzles, 2 Hose columns	Lane orientation, dual-sided. Dual delivery 120/40+120/40, 2 SAT A+B. 3 Inlets, 3 Hydraulic positions	?
2-3-3 1VHS-S	2 Grades Out (1 shared), 3 Nozzles, 3 Hose columns	Lane orientation, single-sided. Single delivery 120/40/40. 3 Inlets, 3 Hydraulic positions	?
2-6-3 1VHS-nS	2 Grades Out (1 shared), 6 Nozzles, 3 Hose columns	Lane orientation, dual-sided. Dual delivery 120*/40/40+120*/40/40. 3 Inlets, 3 Hydraulic positions	?
2-6-3 1VHS-S	2 Grades Out (1 shared), 6 Nozzles, 3 Hose columns	Lane orientation, dual-sided. Dual delivery 120/40/40+120/40/40. 3 Inlets, 3 Hydraulic positions	?

Very High Speed applications will use combination of RC & HC pumping units

- 1VHS-S will deliver 120 LPM also when both sides are in use simultaneously
- 1VHS-nS will deliver 90 LPM when both sides are in use simultaneously, but 120 LPM when used singularly. 120* = non-simultaneously

Model Configurations (Very High Speed Flow)

Helix 6000-II	Nomenclature	Model Characteristics	H6000
3-3-3 1VHS-S	3 Grades Out, 3 Nozzles, 3 Hose columns	Lane orientation, single-sided. Single delivery 120/40/40. 1 SAT A/B. 4 Inlets, 4 Hydraulic positions	?
3-6-3 1VHS-nS	3 Grades Out, 6 Nozzles, 3 Hose columns	Lane orientation, dual-sided. Dual delivery 120*/40/40+120*/40/40. 2 SAT A+B. 4 Inlets, 4 Hydraulic positions	?
3-6-3 1VHS-S	3 Grades Out, 6 Nozzles, 3 Hose columns	Lane orientation, dual-sided. Dual delivery 120/40/40+120/40/40. 2 SAT A+B. 4 Inlets, 4 Hydraulic positions	?
3-4-4 1VHS-S	3 Grades Out (1 shared), 4 Nozzles, 4 Hose columns	Lane orientation, single-sided. Single delivery 120/40/40/40. 4 Inlets, 4 Hydraulic positions	?
3-8-4 VHS-nS	3 Grades Out (1 shared), 8 Nozzles, 4 Hose columns	Lane orientation, dual-sided. Dual delivery 120*/40/40/40+120*/40/40/40. 4 Inlets, 4 Hydraulic positions	?
3-8-4 1VHS-S	3 Grades Out (1 shared), 8 Nozzles, 4 Hose columns	Lane orientation, dual-sided. Dual delivery 120/40/40/40+120/40/40/40. 4 Inlets, 4 Hydraulic positions	?

Very High Speed applications will use combination of RC & HC pumping units

- 1VHS-S will deliver 10 LPM also when both sides are in use simultaneously
- 1VHS-nS will deliver 90 LPM when both sides are in use simultaneously, but 120 LPM when used singularly. 120* = non-simultaneously

Model Configurations (Very High Speed Flow)

Helix 6000-II	Nomenclature	Model Characteristics	H6000
4-4-4 1VHS-S	4 Grades Out, 4 Nozzles, 4 Hose columns	Lane orientation, single-sided. Single delivery 130/40/40/40. 1 SAT A/B. 5 Inlets, 5 Hydraulic positions	??
4-8-4 1VHS-nS	4 Grades Out, 8 Nozzles, 4 Hose columns	Lane orientation, dual-sided. Dual delivery 130*/40/40/40+130*/40/40/40. 2 SAT A+B. 5 Inlets, 5 Hydraulic positions	?
4-8-4 1VHS-S	4 Grades Out 8 Nozzles, 4 Hose columns	Lane orientation, dual-sided. Dual delivery 130/40/40/40/40+130/40/40/40. 2 SAT A+B. 5 Inlets, 5 Hydraulic positions	?
4-5-5 1VHS-S	4 Grades Out (1 shared), 5 Nozzles, 5 Hose columns	Lane orientation, single-sided. Single delivery 130/40/40/40/40. 5 Inlets, 5 Hydraulic positions	?
4-10-5 1VHS-nS	4 Grades Out (1 shared), 10 Nozzles, 5 Hose columns	Lane orientation, dual-sided. Dual delivery 130*/40/40/40/40+130*/40/40/40. 5 Inlets, 5 Hydraulic positions	?
4-10-5 1VHS-S	4 Grades Out (1 shared), 10 Nozzles, 5 Hose columns	Lane orientation, dual-sided. Dual delivery 130/40/40/40/40+130/40/40/40/40. 5 Inlets, 5 Hydraulic positions	???
5-5-4 1VHS-S	5 Grades Out, 5 Nozzles, 4 Hose columns	Lane orientation, Asymmetrical dual-sided. Dual delivery 40/40/40/40+130. 1 SAT A/B. 5 Inlets, 5 Hydraulic positions	?

Very High Speed applications will use combination of RC & HC pumping units

- 1VHS-S will deliver 120 LPM also when both sides are in use simultaneously
- 1VHS-nS will deliver 90 LPM when both sides are in use simultaneously, but 120 LPM when used singularly. 120* = non-simultaneously

Wayne Helix 6000-II

Conventional Fuels - Additive Dosing Model Details



Wayne technology using additive dosing to expand offer up to five grades in shared hose cabinet and integrated tank and dosing system

Wayne Helix 6000-II Additive

Model Overview

Helix 6000-II Additive

Orientation: Lane (Dual-sided only)

Hydraulic System: Suction or Remote Pressure

Additive modules available: 1 or 2 (each 40 ltr tank capacity)

Dosing range: 500 to 3600 ppm

Grades available: 1 to 5 (including dosed grades)

Nozzles available: 1 to 10

Flow Rates^a available: 40, 40-70, 70 or 120^b LPM

Hose Reach: 4.0m with FHR

Electronics: iGEM pump computer

Metering: P-Meter (Piston) or Xflo. Optional ATC

Vapour Recovery: EVR or SC-EVR options

Options: Extensive range of optional extras available

Pump Media: 12" Digital screen for T-Media available

Payment: Integrated payment options available

a) Flow rates are indicative as actual flow rates depends on the underground fuel installation. Actual flow rates can vary +/- 10% from nominal flow rates.

b) Flow rate 120 LPM available in same cabinet without additive dosing

	Length	Width	Height
1 module	+211	600	2050
2 modules	+421	600	2050

Wayne Helix 6000-II

Alternative Fuels – AdBlue Model Details

Wayne Helix 6000-II AdBlue

Model Overview

Wayne technology for AdBlue with one or two nozzles for both HV & LV



Available also as back-to-back

Helix 6000-II AdBlue

Orientation: Lane (Dual-sided or Single-sided)

Hydraulic System: Remote Pressure

Grades available: 1

Nozzles available: 1 to 4

Flow Rates available: 10 or 20 LPM (LV, HV nozzle)

Hose Reach: 4.0m with Full Hose Retraction

Electronics: iGEM pump computer

Metering: P-Meter (Piston)

Heating: ATEX heating, non-ATEX heating

Options: Extensive range of optional extras available

Pump Media: 12" Digital screen for T-Media available

Payment: Integrated payment options available

	Length	Width	Height
H6000-II 1-X-1	920	600	2050
H6000-II 1-X-2	1060	600	2050

*Dimensions shown without heating

Model Configurations AdBlue

H6000-II	Nomenclature	Model Characteristics	H6000
1-1-1 ADB	1 Grade Out, 1 Nozzle, 1 Hose column	Lane orientation, single-sided. Single delivery 20 ^a . 1 Inlet, 1 Hydraulic position	?
1-2-1 ADB	1 Grade Out, 2 Nozzles, 1 Hose column	Lane orientation, dual-sided. Dual delivery 20 ^a +20 ^a . 1 Inlet, 1 Hydraulic position	?
1-2-2 ADB	1 Grade Out, 2 Nozzles, 2 Hose column	Lane orientation, single-sided. Dual delivery 20/10. 1 Inlet, 1 Hydraulic position	?
1-4-2 ADB	1 Grade Out , 4 Nozzles, 2 Hose columns	Lane orientation, dual-sided. Dual delivery 20/10+20/10. 1 Inlet, 1 Hydraulic position	?

AdBlue models

■ Available as standalone model or Back-2-Back for up to maximum of 10 nozzles

a) Flowrate either HV 20 LPM or LV 10 LPM

Wayne Helix 6000-II

Alternative Fuels – LPG Model Details

Wayne Helix 6000-II LPG

Model Overview

Wayne technology with same modularity for LPG available as standalone or back-2-back



Available also as back-to-back

Helix 6000-II LPG

Orientation: Lane (Dual-sided or Single-sided)

Hydraulic System: Remote Pressure

Grades available: 1

Nozzles available: 1 to 2 (multiple connections available)

Flow Rates available: 50 LPM (Max 25 bar)

Hose Reach: 3.9m with Hose Retraction

Electronics: iGEM pump computer

Metering: GPL 700 meter

Options: Extensive range of optional extras available

Pump Media: 12" Digital screen for T-Media available

Payment: Integrated payment options available

	Length	Width	Height
H6000-II 1-X-1	1060	600	2050

Model Configurations LPG

H6000-II	Nomenclature	Model Characteristics	H6000
1-1-1 LPG	1 Grade Out, 1 Nozzle, 1 Hose column	Lane orientation, single-sided. Single delivery 50. 1 Inlet, 1 Hydraulic position	?
1-2-1 LPG	1 Grade Out, 2 Nozzles, 1 Hose column	Lane orientation, dual-sided. Dual delivery 50+50. 1 Inlet, 1 Hydraulic position	?

LPG models

- Available as standalone model or Back-2-Back for up to maximum of 10 nozzles

Wayne Helix 6000-II

Alternative Fuels – CNG Model Details

Wayne Helix 6000-II CNG

Model Overview

Wayne technology with same modularity for CNG available as standalone or back-2-back



Available also as back-to-back

Helix 6000-II CNG

Orientation: Lane (Dual-sided or Single-sided)

Hydraulic System: Remote Pressure

Grades available: 1

Nozzles available: 1 to 4 (NGV1, NGV2 available)

Flow Rates available: up to 80 kg/m (Max 260 bar)

Hose Reach: 4.3m with Hose Retraction

Electronics: Pump computer

Metering: Mass flow meter

Options: Extensive range of optional extras available

Pump Media: 12" Digital screen for T-Media available

Payment: Integrated payment options available

	Length	Width	Height
H6000-II 1-X-1	893	600	2050
H6000-II 1-X-2	1225	600	2050

Model Configurations CNG

H6000-II	Nomenclature	Model Characteristics	H6000
1-1-1 CNG	1 Grade Out, 1 Nozzle, 1 Hose column	Lane orientation, single-sided. Single delivery NGV1 ^a . 1 Inlet, 1 Hydraulic position	?
1-2-1 CNG	1 Grade Out, 2 Nozzles, 1 Hose column	Lane orientation, dual-sided. Dual delivery NGV1 ^a +NGV1 ^a . 1 Inlet, 1 Hydraulic position	?
1-2-2 CNG	1 Grade Out, 2 Nozzles, 2 Hose column	Lane orientation, single-sided. Dual delivery NGV1/NGV2. 1 Inlet, 1 Hydraulic position	?
1-4-2 CNG	1 Grade Out, 4 Nozzles, 2 Hose columns	Lane orientation, dual-sided. Dual delivery NGV1/NGV2+NGV1/NGV2. 1 Inlet, 1 Hydraulic position	?

CNG models

■ Available as standalone model or Back-2-Back for up to maximum of 10 nozzles

a) Flowrate either HV 20 LPM or LV 10 LPM

